

#### **MICRO PUMP ORANGE EDITION FROM XAVITECH**

ORANGE Edition is suitable for those who need a high quality micro pump and can manage with a somewhat limited service lifespan. ORANGE Edition has a defined service lifespan of 1,000 hours and a fixed interface with your system.

- Affordable solution
- Guaranteed service lifespan
- Highest quality


#### **MICRO PUMP WITH GUARANTEED FUNCTION OF 1,000 HOURS**

It can be frustrating to need to adapt your product to variations in the service lifespans of pumps. With the ORANGE Edition, you get a micro pump that is guaranteed to work for the full 1,000 hours it was designed to do, at a very good price. In this way, you do not need to pay for pumps with longer service lifespans in order to be assured that the pump will actually work for the stated number of hours.

#### **ORANGE EDITION PROVIDES HIGH QUALITY AT AN AFFORDABLE PRICE**

Xavitech's belief in high quality pervades this pump version. Flexibility is limited in the ORANGE Edition, which allows for such an affordable price. It is sold in a limited number of standard designs for each pump model. If this is too limiting, then we suggest you check out our BLACK edition instead.

**GENERAL FLOW PERFORMANCE V200 PUMPS**

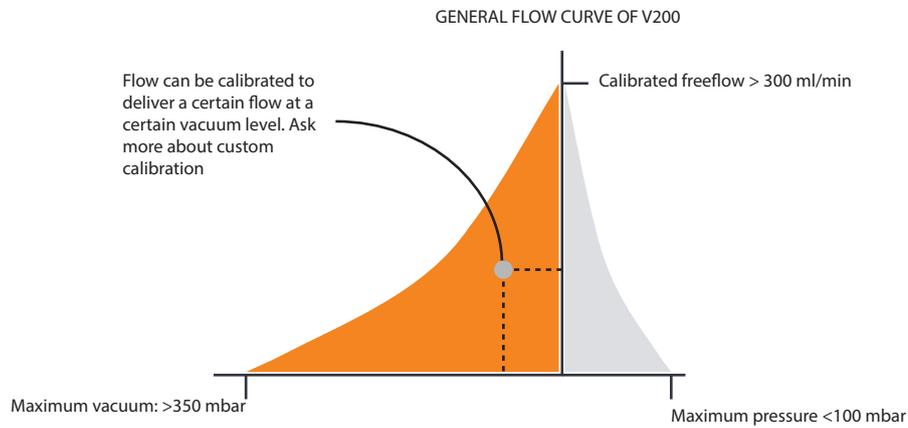

<b>PUMP MODEL</b>	<b>V200 ORANGE EDITION</b>
PERMISSABLE AMBIENT TEMP	0 - 55 C (Extended temp. range can be approved)
PERMISSABLE MEDIUM TEMP	0 - 55 C (Extended temp. range can be approved)
FLOW MEDIA	Air and gas. (Ask for compability)
WETTED PARTS	EPDM and PPS (Other materials on request)
CAPACITORS	Missing VCC capactor can damage the pump. See electrical interface datasheet
CONNECTIONS	Incorrect lead connection can damage the pump
FILTERS	To insure lifetime, air filters should be used in order to prevent contaminations like dust to enter the pump
FLOW TOLERANCES	Flow can vary -/+ 5% of calibrated specification between individual pumps
VACUUM AND PRESSURE TOLERANCES	Vacuum and pressure can vary -/+ 5% of calibrated specification between individual pumps
PUMP FLOW	Flow can only be in one direction and can not be reversed

### STANDARD MODELS (Part number)

The ORANGE version is only available in fixed voltages and can not be customized on flow calibration. The lifetime is also fixed. Choose the BLACK edition if more flexible solutions is required.

MODEL	VOLTAGE (DC)	FLOW (ml/min)	MAX VACUUM (mbar)	CONNECTION INTERFACE	ANALOG FLOW CONTROL	SERIAL INTERFACE (RS-232)	LIFE TIME (Hours)
V200-O2C5V	5V	>200	>300	2 Wires	NO	NO	1000
V200-O2C12V	12V	>300	>300	2 Wires	NO	NO	1000

Information furnished is believed to be accurate and reliable. However, Xavitech assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Xavitech. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. Xavitech products are not authorized for use as critical components in life support devices or systems without express written approval of Xavitech.